



# Dual HDMI with 2-Port Decorex Insert

## PRODUCT SPECIFICATION

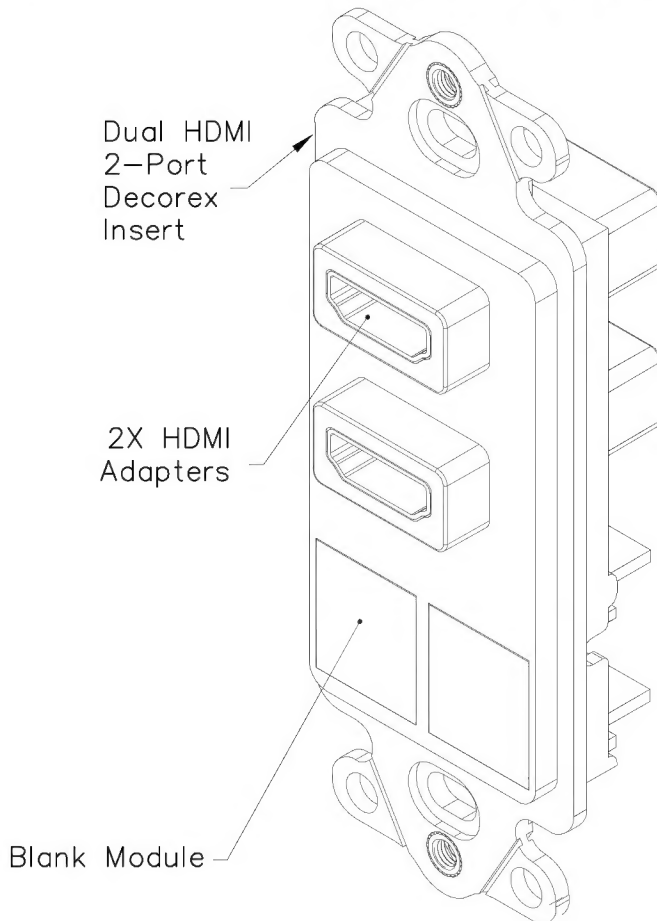

### Package includes:

- A. Dual HDMI, 2-Port Decorex Insert, 1 pc
- B. Blank Module, 2 pcs



- C. #6-32 x 3/4" Pan Head Machine Screw, 2 pcs



### Features and Benefits:

- Designed to distribute high quality video, audio and other communication needs with contemporary styling for commercial or residential applications
- HDMI (High Definition Multimedia Interface) connectors are ideal for high-definition video and audio devices
- Fits standard NEMA electrical boxes
- Rugged and durable construction
- Designed for a consistent look with standard decorator style faceplates
- Compatible with all IC107 Decorex faceplates
- Accommodates a wide variety of easy to snap-in modules, providing configuration flexibility
- Compatible with all IC107 HD modules
- Housing available in almond, black, ivory, and white
- Supports v1.2, v1.3, v1.4a, 720p, 1080i, 1080p, 3D, and HDCP; typical maximum distance for HDMI cable is 33ft. (10 meters).


### INSERT, DECOREX, DUAL HDMI, 2-PORT

ITEM NO.	IC107DDHXX
DWG NO.	PS107DDH00

REV.	C
PAGE NO.	1



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com

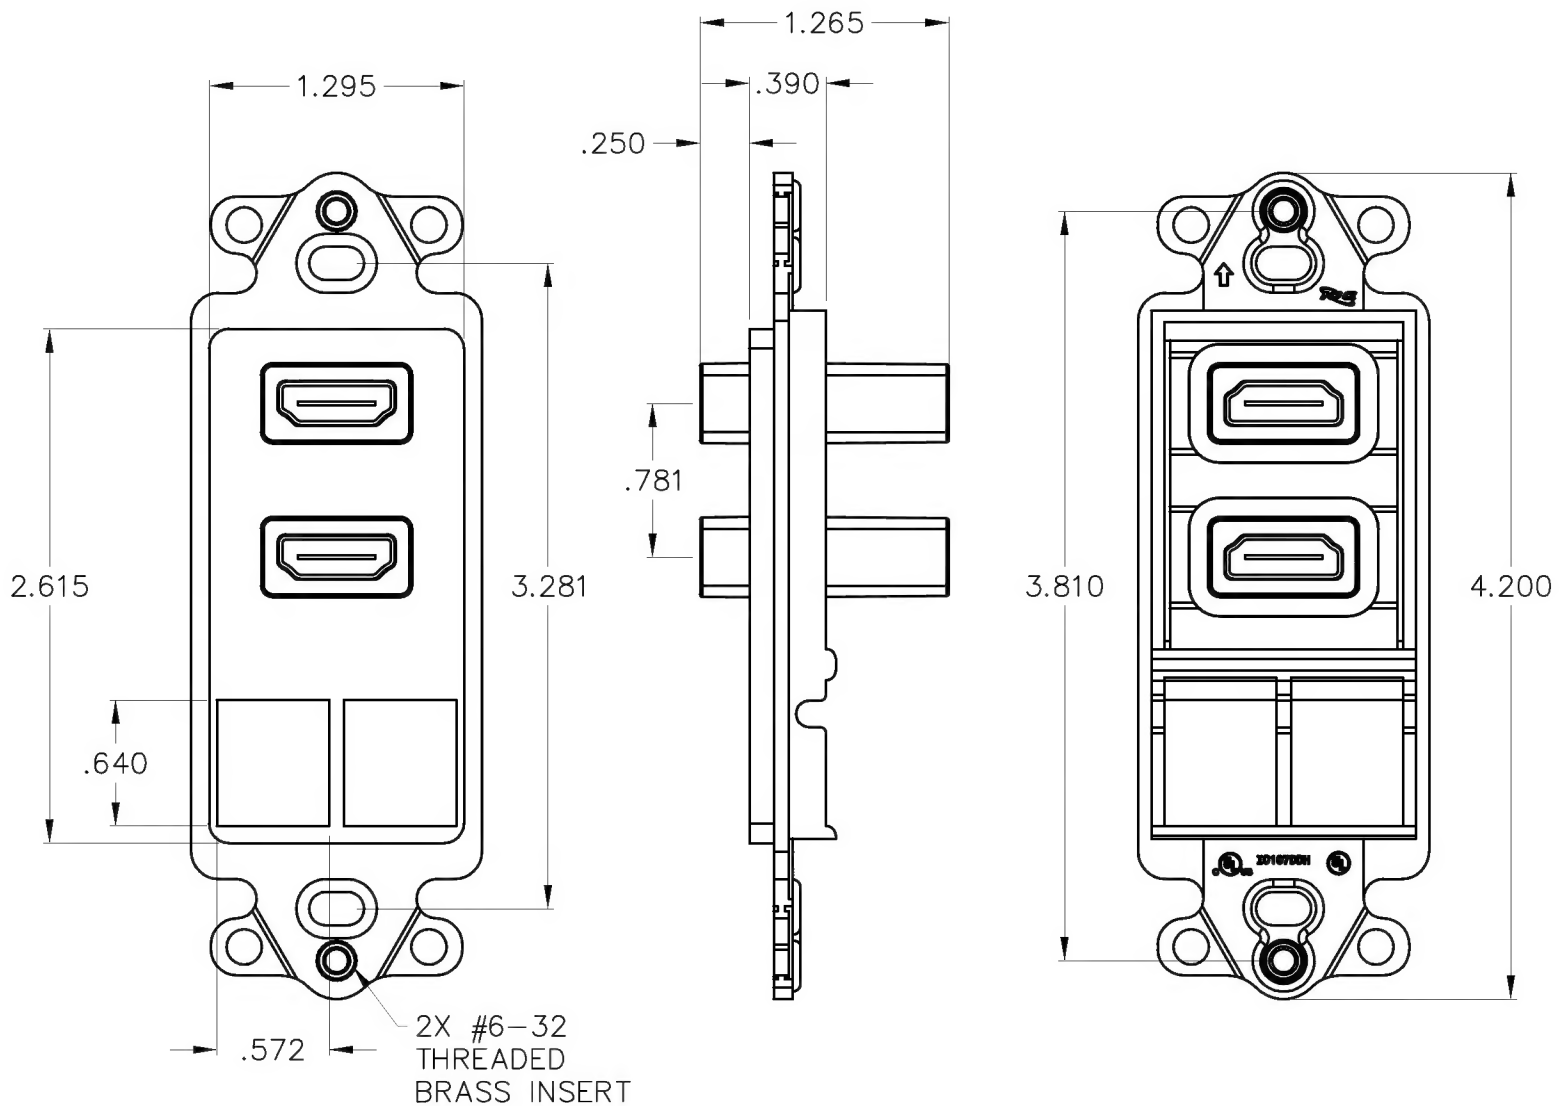

**NOTE: UNLESS OTHERWISE SPECIFIED**

1. MATERIAL: ABS, UL 94V-0
2. COLOR: XX: AL-ALMOND, BK-BLACK, IV-IVORY & WH-WHITE
3. MECHANICAL:
  - A. FINISH: BRASS WITH FLUSH GOLD PLATING
  - B. PLASTIC COVER: PVC
4. ELECTRICAL:
  - A. DIFFERENTIAL IMPEDANCE:
    - CABLE AREA: 100 OHMS +/- 10
    - 100% OPEN SHORT MIS-WIRE TEST
  - B. CONTACT RESISTANCE: 2 OHM MAX.
  - C. INSULATION RESISTANCE: 10 MEGA OHM (MIN.)
  - D. WITHSTAND VOLTAGE: 0.1 SEC. DC 200V
  - E. HI-POT: AC 200V/ 1.0mA
  - F. INSTANTANEOUS OPEN/SHORT: 1 SEC.

**INSERT, DECOREX, DUAL HDMI, 2-PORT**

ITEM NO. IC107DDHXX  
 DWG NO. PS107DDH00

REV. C  
 PAGE NO. 2



CUSTOMER CARE / TECHNICAL SUPPORT \* CSR@ICC.COM / 888-ASK-4-ICC (275-4422) \* 14700 Alondra Blvd., La Mirada, CA 90638 \* www.icc.com